



LONG LASTING
**MANUFACTURER'S
WARRANTY**

BEHIND THE LAYERS PATENTED STAY-DRY DESIGN

HOOK AND LOOP LATCH

EASY ON/OFF FASTENING SYSTEM

OUTER-SHELL
DURABLE PROTECTIVE
MOISTURE BARRIER



PROTECTIVE DRY BAG
KEEPS INSULATION DRY AND
PREVENTS CORROSION

INSULATION LAYER
1" OF ASBESTOS FREE "E" GLASS MAT


INNER-SHELL

PROTECTION AGAINST CORROSION (-50°F TO 500°F)



866-388-0090

9525 E 51st St, Suite A | Tulsa, OK - USA

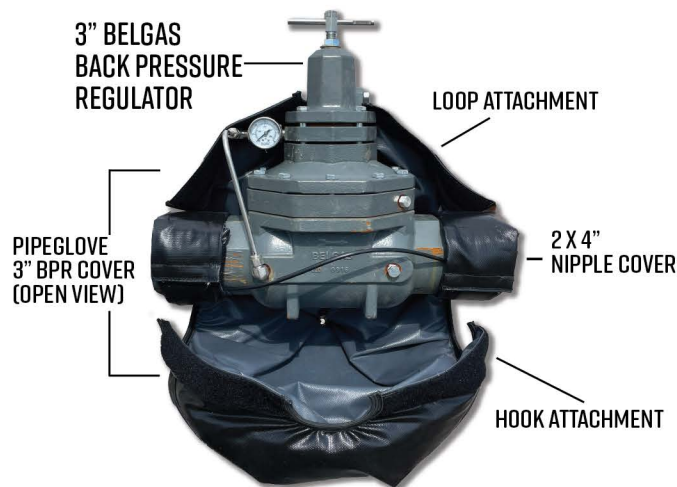

**PIPEGLOVE INSULATION IS LESS EXPENSIVE
TO INSTALL, REMOVEABLE AND REUSABLE,
AND LONGER LASTING.**

PREVENTION: FEWER SHUT DOWNS/BREAKAGES CAUSED BY FREEZING

LONGEVITY: DURABLE AND CONTAINS MOISTURE VENTS

BREATHABILITY: ELIMINATES CORROSION UNDER INSULATION (CUI)

STRENGTH: WITHSTANDS MECHANICAL IMPACT

RESISTANT: UV, MOISTURE, AND CHEMICALS

pipeglove.com



PipeGLOVE
REUSABLE INSULATION FOR 1" TO
12" DIA. PIPING AND FITTINGS



**Fewer Freeze Ups.
More Uptime.**


- ✓ FAST AND EASY INSTALLATION.
- ✓ PRE-MANUFACTURED FOR SUPERIOR FIT.
- ✓ SUPERIOR DESIGN = LONGERLASTING.
- ✓ REMOVEABLE AND REUSABLE.
- ✓ NO TOOLS OR WIRING REQUIRED!



866-388-0090



REUSABLE INSULATION

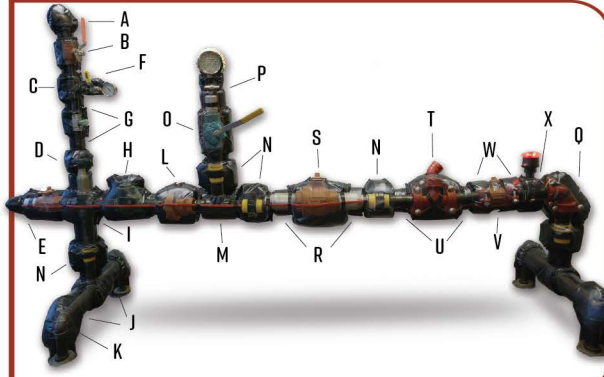

- | | | |
|----------------------|-----------------------|------------------------|
| A- 1" 90° | I- 2" CROSS LP | Q- 2" 90° GROOVED BOOT |
| B- 1" BALON BV 750 | J- 2" x 8" NIPPLES | R- 2" x 3" SWEDGE |
| C- 1" TEE LP | K- 2" 90° LP | S- 3" BALON BV 750 LP |
| D- 1" HAMMER UNION | L- 2" HP BV THREADED | T- 2" TEE GROOVED BOOT |
| E- 2" BULL PLUG | M- 2" TEE LP | U- 2" x 6" NIPPLES |
| F- 3/4" BALON BV | N- 2" HAMMER UNION LP | V- 2" BV GROOVED LP |
| G- 1" x 4" NIPPLES | O- 2" BV THREADED | W- 2" GROOVED COUPLING |
| H- 2" CHECK VALVE LP | P- 2" x 1" SWEDGE | X- 2" TRACE LIGHT |

MORE COVERS

1" DIAMETER - 12" DIAMETER LINES
NIPPLE LENGTHS: 2", 4", 6", 8", 10", 12", 24"

THREADED • GROOVED • FLANGED

PIPE STAND

45° LP

DUMP VALVE

KIMRAY MV 2200

HPG 30

COUPLING END CAP

UNION 150

UNION 300-600

UNION END CAP

BALLVALVE 150-300

UNIVERSAL WRAP
(4"x67")

WARREN BV 150-300

BALON BV GEAR 300

BALON BV GEAR 600

BV (KF) 600

WARREN BV 900

CAMERON CV 150

CAMERON CV 300

2" BP REGULATOR

3" BP REGULATOR

KIMRAY MV 2150

KIMRAY MV BONNET

FLOW METER

STRAINER (VIKING)

STRAINER (IFC) 150

WING VALVE (MED)

WING VALVE (DBL) LG

BUTTERFLY VALVE

ACTUATOR VALVE

BURKS PUMP

ANSI PRO PUMP

PUMP (ROPER)

BIG JOE REGULATOR

LITTLE JOE REGULATOR

LP Check Valve Cover



2" Diameter Nipple Covers



1" Little Joe Gas Regulator Cover



CHECK, CHOKE AND BALL VALVES

- 360° OF PROTECTION
- VALVE HANDLE OPENING
- 1" INSULATION
- OVERLAPPING FITMENT

PIPING COVERS 1" TO 12" DIA. PIPE

- UV AND CHEMICAL PROTECTION
- INSPECTION FRIENDLY
- NIPPLES: 2", 4", 6", 8", 10", 12"
- STRAIGHTS: 24"


90° ELBOWS AND BOOTS

- THREADED / GROOVED / FLANGED
- 100% REUSABLE
- 1" INSULATION
- AVAILABLE SIZES: 1" TO 12"

1" LITTLE JOE REGULATOR

3 PIECE COVER PROVIDES:

- 360° OF PROTECTION
- VENT OPENING
- 1/2" INSULATION
- FITS ANY DIRECTION

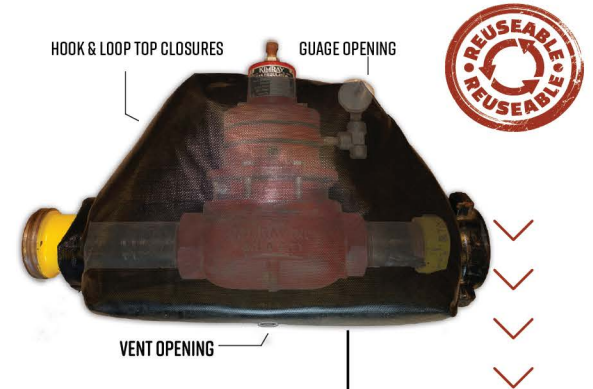

BACK PRESSURE REGULATOR COVER TOOL FREE DESIGN

VALVE AND REGULATOR FREEZE-UPS OCCUR IN ABOVE-FREEZING TEMPERATURES DUE TO THE JOULE-THOMSON EFFECT. THE TEMPERATURE OF A GAS OR LIQUID IN A PIPE, UNDER PRESSURE, WILL DROP WHEN DEPRESSURIZED. VALVES AND REGULATORS CAUSE THESE DROPS IN PRESSURE AND ARE PRONE TO FREEZE IF NOT HEATED AND INSULATED PROPERLY. IN THE EVENT OF A FREEZE-UP, STEAMERS CAN INTRODUCES MOISTURE TO TRADITIONAL INSULATION AND CAUSE BROAD DEGRADATION. PIPEGLOVE'S STAY-DRY, REUSABLE INSULATION, HELPS ELIMINATES FREEZE-UPS AND THE ILL-EFFECT OF STEAMERS.

KIMRAY 2200 MOTOR VALVE:
2 PIECE BONNET



SUBMIT YOUR PROJECT
CUSTOM INSULATION
PIPEGLOVE.COM

MANUFACTURED IN: TULSA, OK

MORE INFORMATION

866-388-0090

